



BUY – SELL – REPAIR – CALIBRATE
sales@simbol.ca 1-866-396-6248



Simbol Test Systems is the one-stop shop for all your fiber optic test equipment and measurement needs. As we are exclusively focused on e-commerce and international distribution of photonic products since 2000, our customers rely on the [AssetRelay](#) catalog to find our stock listings of thousands of used and refurbished popular test equipment. They know they can get repair, customization and calibration services from our laboratory for their own fiber optic instruments from all renowned brand manufacturers.

HP, Agilent, Keysight 86120C Wavelength Meter (Wavemeter) Calibration and Repair Services

With more than 20 years of expertise in repair of OSA, Tunable Lasers, Wavemeters and more, the quality of our services is renowned amongst the service centers community and highly appreciated by our partners and customers. We developed custom software allowing us to perform automatic calibration tests. Don't settle for a two-page summary assessment to trust that your Wavemeter is operating correctly across the full wavelength range; our report contains the complete table of all results, confirming it has **really** been tested.

If you are looking to buy a 86120C


We have an extensive inventory of HP, Agilent or Keysight 86120C Wavelength meters. Visit our 86120C specific postings [here](#) to see our current stock with actual photos. Each Wavemeter we sell ships after it has gone through a premium calibration to ensure it meets or exceeds manufacturer's published specifications. The equipment is shipped with a comprehensive 5-page calibration report including data, a calibration sticker and its own dated calibration certificate. A report from other labs with less data points reflects a not completely calibrated unit. So be careful of other sellers saying their equipment is "tested good", "powered on, self-tested", "pulled from a working environment". When you choose AssetRelay, you can be confident that we actually test everything we sell so you know it will work when it gets to your workplace.

You might consider buying one of our completely refurbished unit which are shipped with new HeNe laser, new display, many new electronic components and a refurbished motor. The refurbishing work is done by our specialists with years of experience in the field. Comes with one year complete unit warranty; even on parts we didn't change.

List of specifications calibrated

- Absolute Wavelength Accuracy
- Maximum Input Power
- Sensitivity
- Polarization Dependence
- Optical Return Loss
- Amplitude Accuracy and Linearity

Traceability: Instrumentation used during this calibration is traceable to N.I.S.T (National Institute of Standards and Technology) or C.N.R.C. (Canadian National Research Council).

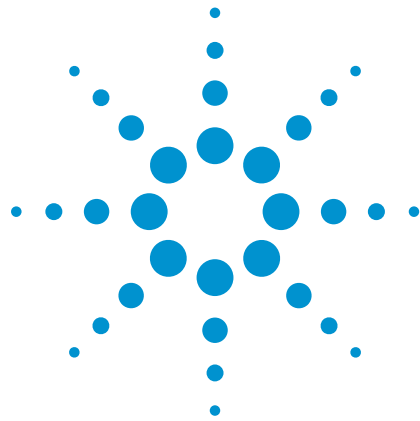

Agilent
Agilent 86120B, 86120C, 86122A
Multi-Wavelength Meters
Data Sheet



Agilent multi-wavelength meters are Michelson interferometer-based instruments that measure wavelength and optical power of laser light over a specified wavelength range. Simultaneous measurements of multiple laser lines are performed allowing measurements of DWDM signals and multiple lines of Fabry-Perot lasers. Each laser line is assumed to have a linewidth (including modulation sidebands) of less than:

- 10 GHz for the 86120B,
- 5 GHz for the 86120C and
- 2.5 GHz for the 86122A.

This technical specifications sheet describes the measurement accuracy and operating conditions of the Agilent 86120B, 86120C and 86122A Multi-Wavelength Meters. The specifications apply to all functions over the temperature range of 0 to 55 °C and relative humidity <95% (unless otherwise noted). All specifications apply after the instrument's temperature has been stabilized after 15 minutes continuous operation, and when the instrument is in NORMAL UPDATE mode (86120B and 86120C).

Definitions of Terms

Characteristics and Specifications

The distinction between specifications and characteristics is described as follows:

- Specifications describe warranted performance.
- Characteristics provide useful, but non-warranted information about the functions and performance of the instrument.
- General Characteristics Give additional information for using the instrument. These are general descriptive terms that do not imply a level of performance.

Wavelength

- Range refers to the allowable wavelength range of the optical input signal.
- Absolute accuracy indicates the maximum wavelength error over the allowed environmental conditions.
- Differential accuracy indicates the maximum wavelength error in measuring the wavelength difference between two signals that are simultaneously present.
- Minimum resolvable separation indicates the minimum wavelength separation of two laser lines input required to measure each wavelength simultaneously. Two laser lines closer in wavelength than the minimum resolvable separation are not resolved and one average wavelength is displayed.
- Display resolution indicates the minimum incremental change in displayed wavelength.

Power

- Calibration accuracy indicates the maximum power calibration error at the specified wavelengths over the allowed environmental conditions.
- Flatness refers to the maximum amplitude error in a measurement between two lines that are separated in wavelength by no more than the specified amount.
- Linearity indicates the maximum power error in measuring the change in power of one laser line.
- Polarization dependence indicates the maximum displayed power variation as the polarization of the input signal is varied.
- Display resolution indicates the minimum incremental change in displayed power.

Sensitivity

- Sensitivity is defined as the minimum power level of a single laser line input to measure wavelength and power accurately. A laser line with less than the minimum power may be measured but with reduced wavelength and power accuracy. For multiple laser lines input, sensitivity may be limited by total input power.

Selectivity

- Selectivity indicates the ability to measure the wavelength and power of a weak laser line in the proximity of a specified stronger laser line and separated by the specified amount.

Input Power

- Maximum displayed level indicates the maximum total input power (total of all laser lines present) to accurately measure wavelength and power.
- Maximum safe input power indicates the maximum total input power (total of all laser lines present) to avoid permanent optical damage to the instrument.

Maximum Number of Lines Input

- Maximum number of lines input is the maximum number of displayed lines. If more than the specified number of lines is input, only the longest wavelength lines are displayed.

Input Return Loss

- Input return loss indicates the optical power reflected back to the user's fiber cable relative to the input power. It is limited by the return loss of the front panel connector, and assumes the user's connector is good.

Measurement Cycle Time

- Measurement cycle time refers to the cycle time when measuring wavelength and power of laser lines. Specific advanced applications may require longer cycle times.

Specifications

	86120B	86120C	86122A	Notes
Wavelength				
Range	700-1650 nm (182-428 THz)	1270-1650 nm (182-236 THz)	1270-1650 nm (182-236 THz)	
Absolute Accuracy at 1550 nm at 1310 nm for laser lines separated by	±3 ppm +0.005 nm +0.004 nm 30 GHz	±2 ppm +0.003 nm +0.003 nm 15 GHz	+0.2 ppm ±0.3 pm ±0.3 pm 10 GHz	
Differential Accuracy ¹	±2 ppm	±1 ppm	±0.15 ppm	
Minimum Resolvable Separation ¹ (equal power lines input) at 1550 nm at 1310 nm for laser lines separated by	20 GHz 0.16 nm 0.11 nm 30 GHz	10 GHz 0.08 nm 0.06 nm 15 GHz	5 GHz 0.04 nm 0.03 nm 10 GHz	For lines separated by less than the specified amount, wavelength accuracy is reduced.
Display Resolution Fast update mode		0.001 nm 0.01 nm	0.0001 nm N/A	
Units	nm (vacuum or standard air), cm ⁻¹ , THz			
Power				
Calibration Accuracy	±0.5 dB (at ±30 nm from 780, 1310, and 1550 nm)	±0.5 dB (at ±30 nm from 1310 and 1550 nm)		
Flatness ¹	±0.2 dB (1200 to 1600 nm) ±0.5 dB (700 to 1650 nm)	±0.2 dB (1270 to 1600 nm) ±0.5 dB (1270 to 1650 nm)		30 nm from any wavelength
Linearity	±0.3 dB (1200 to 1600 nm)	±0.3 dB (1270 to 1600 nm)		Lines above -30 dBm
Polarization Dependence	±0.5 dB (1200 to 1600 nm) ±1.0 dB ¹ (700 to 1650 nm)	±0.5 dB (1270 to 1600 nm) ±1.0 dB ¹ (1600 to 1650 nm)		
Display Resolution	0.01 dB			
Units	dBm, mW, μW			
Sensitivity ²				Characteristic noise floor -60 dBm
Single Line Input	-20 dBm (700 to 800 nm) -25 dBm (800 to 1200 nm) -40 dBm (1200 to 1600 nm) -30 dBm (1600 to 1650 nm)	-40 dBm (1270 to 1600 nm) -30 dBm (1600 to 1650 nm)	-32 dBm (1270 to 1650 nm)	
Multiple Lines Input ^{1,3}	30 dB below total input power, but not less than single line input sensitivity			
Selectivity ¹	25 dB spacing 100 GHz 10 dB spacing 30 GHz	25 dB spacing 50 GHz 10 dB spacing 15 GHz	25 dB spacing 90 GHz 10 dB spacing 10 GHz	
Input Power				
Maximum Displayed Level	+10 dBm			sum of all lines input
Maximum Safe Input Level	+18 dBm			
Return Loss With Non-Angled (PC) Connectors (Option 021) With Angled (PC) Connectors (Option 022)	35 dB 50 dB			
Measurement Cycle Time		1.0 s	0.5 s	
Maximum Number of Lines	100	200	1000 ⁴	
Measurement Modes	List by wavelength table, list by power table, signal wavelength and power, average wavelength and total power			Data Logging and sorting by any parameter are included in the 86122A.
Delta Modes	Delta wavelength, delta power, delta wavelength and power			

Specifications (cont'd)

	86120B	86120C	86122A	Notes
Built in Automatic Measurement Applications				
Signal to Noise Ratio ^{1,6} Channel Spacing 200 GHz Channel Spacing 100 GHz Channel Spacing 50 GHz	>35 dB with 100 averages	>35 dB with 100 averages >27 dB with 100 averages	>35 dB with 100 averages >27 dB with 100 averages	0.1 nm noise bandwidth. Lines above -25 dBm.
Drift	Maximum, minimum, total drift (max-min) of wavelengths and powers over time			
Fabry-Perot Characterization	Mean wavelength, peak wavelength, mode spacing full-width half maximum, peak amplitude total power, sigma			
Coherence Length ¹	Fabry-Perot lasers, 1 to 200 mm coherence length, accuracy to within ±5%, 0.75 cycle time			
Additional Features	Power offset, power bars (on or off), user adjustable peak excursion and peak threshold, user adjustable start and stop wavelength limits, graphical display, save and recall instrument states.			
Inputs/Outputs				
Optical Input	9/125 μm single-mode fiber			
Rear Panel Connectors	GPIB, parallel printer port, AC line		LAN, PS/2 for Keyboard & Mouse, SVGA for external monitor, GPIB, parallel printer port, AC Line, optional optical input	
Dimensions and Weight				
Dimensions	140 mm high x 340 mm wide x 465 mm deep (5.5 in x 13.4 in x 18.3 in) 9 kg (19 lb)		138 h x 425 w x 520 mm d (5.2 in x 16.7 in x 20.5 in) 14.5 kg (32 lb)	
Environmental				
Operational Temperature	0°C to +55°C		15°C to 35°C,	
Humidity ⁵	<95% R.H. at +40°C, 5 day soak		<75% R.H. at 35°C	
Shock ⁵	300 g		120 g	Half sine, 2 msec pulse
Vibration ⁵	5 g rms 0.75 g (0 to peak)		2 g rms 0.5 g (0 to peak)	Random, 5 to 500 Hz, 10 min./axis Sine, 5 to 500 Hz, 1 octave/min.
EMC	Conducted and radiated interference is in compliance with CISPR Pub 11, IEC 801-2, IEC 801-3, IEC 801-4 and IEC 555-2			
Storage Temperature	-40°C to +70°C			
Humidity ⁵	90% R.H. at +65°C for 24 hrs.		95% R.H. at +45°C, 5 day cycle	Non-condensing
Power Requirements				
Voltage and frequency Maximum Power	100 / 115 / 230 / 240 V~, 50 / 60 Hz 70 watts max (125 VA max)		100 / 115 / 230 / 240 V~, 50 / 60 Hz 310 VA max	

1 Characteristic

2 Contact Agilent Technologies for availability of special instruments with higher sensitivity.

4 For 86122A number of laser lines may be limited by signal power requirements for accurate wavelength measurements.

5 Type tested means tested, but not warranted, for continuous operation.

6 At 1550 nm

General Characteristics

The 86122A Wavelength Meter contains an internal HeNe Laser, which is necessary to provide this high level of absolute wavelength accuracy.

HeNe Laser

Typical operating lifetime: 15000 h

Ordering Information

For the most up-to-date ordering information, please contact your Agilent sales representative

86120B/C Multi-Wavelength Meter

Optical Connectors

86120x-012	FC Connector (default)
86120x-013	DIN Connector
86120x-014	ST Connector
86120x-017	SC Connector
86120x-021	Straight (non-angled) Contact Interface-PC
86120x-022	Angled Contact Interface-APC

Accessories

86120x-AXE	Rack Flange Kit with Handles
86120x-IA4	Rack Flange Kit without Handles
86120x-UK6	Commercial Calibration Certificate with Test Data

Documentation

86120x-ABA	English Operation Manual (default)
86120x-OB0	Do not include an Operation Manual

86122A Multi-Wavelength Meter

Optical Connectors


86122A-021	Straight (non-angled) Contact Interface-PC (default)
86122A-022	Angled Contact Interface-APC
86122A-400	Front Panel Fiber Input (default)
86122A-401	Rear Panel Fiber Input
81000FI	FC Connector (default)
81000KI	SC Connector
81000SI	DIN Connector

Accessories

86122A-1CM	Rack Mount Kit without Handles
86122A-1CN	Handle Kit
86122A-1CP	Rack Mount Kit plus Handles
86122A-UK6	Commercial Calibration Certificate with Test Data

Documentation

86122A-ABA	English Operation Manual (default)
86122A-OB0	Do not include an Operation Manual

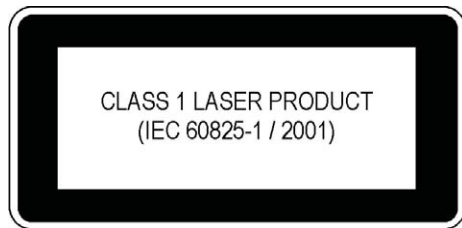

Optical instruments online information

Optical test instruments

www.agilent.com/find/oct

Lightwave Component Analyzers

www.agilent.com/find/lca

Polarization solutions

www.agilent.com/find/pol

Spectral analysis products

www.agilent.com/comms/octspectral

Electro-optical converters

www.agilent.com/find/ref

Optical test instruments accessories

www.agilent.com/comms/oct-accessories

Firmware and driver download

www.agilent.com/comms/octfirmware

Agilent photonic discussion forum

www.agilent.com/find/photonic_forum

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.



www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

www.agilent.com

For more information on Agilent Technologies' products, applications or services, please

contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	0820 87 44 11
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	01805 24 6333**
	**0.14 €/minute
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: March 27, 2008

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2008

Printed in USA, April 17th, 2008

5988-5422EN



Agilent Technologies